



Media Technology & Solutions Pvt. Ltd.

# Inventory Catalogue

Email: [info@sslmediatech.com](mailto:info@sslmediatech.com) | Tel: 022-23811823 | Mob: +91- 9820022984

# SSL Showlight 31x10 W White LED


The SSL Show Light is a versatile and powerful LED fixture with 31 high-intensity 10W white LEDs. This fixture guarantees impressive brightness and exceptional performance.

Ideal for long-distance throws, face lighting, and especially perfect for sports lighting, this fixture regularly features on the riders of Pro Kabaddi league, Kho Ultimate Kho Kho, Ultimate Table Tennis, and more. The SSL Show Light delivers stunning illumination that brings every detail to life.

Designed with precision and control in mind, the fixture supports the International Standard DMX-512 signal, offering seamless integration into any lighting setup. You can choose between 1CH and 2CH control channel modes, allowing for easy customization according to your needs.

The SSL Show Light features a dimming mode that allows fast and smooth linear dimming from 0 to 100, giving you precise control over the intensity of the light. Its honeycomb-type high transparent PMMA second optical lens ensures even and focused light distribution, while the strobe speed of 1-20Hz adds dynamic effects to your lighting setup.

Whether you're lighting up a large stadium or creating captivating visuals for a sporting event, the SSL Show Light is your go-to lighting solution for outstanding results. Illuminate your world with the brilliance of the "SSL Show Light" and create unforgettable experiences for your audience.

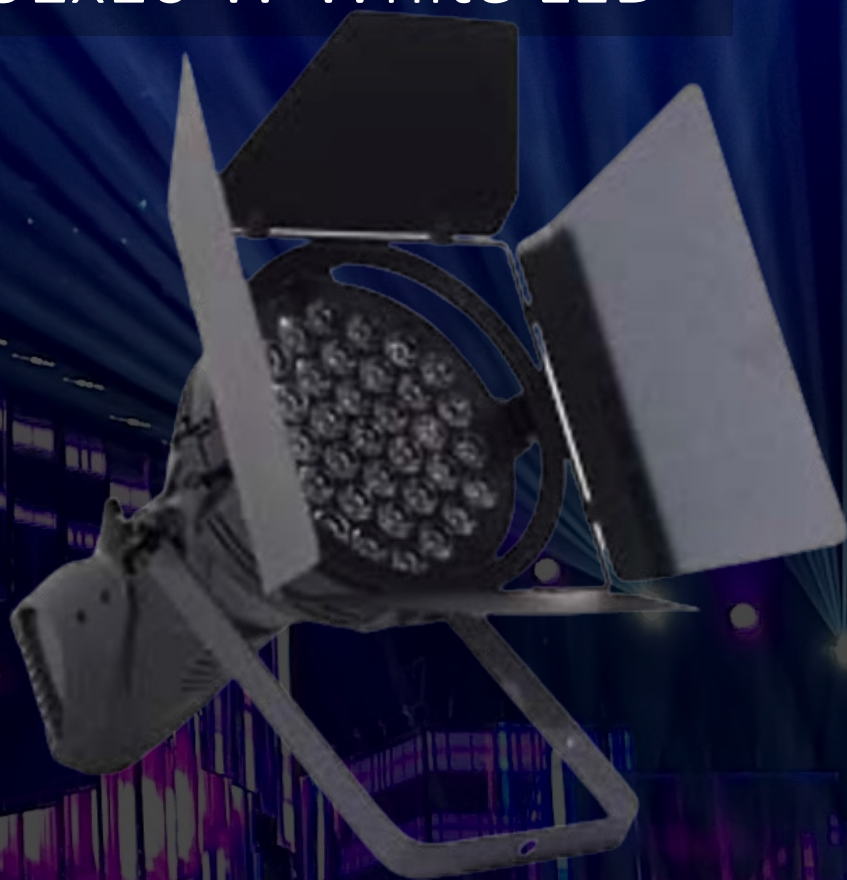



## Technical Specifications

Parameter	Specification
Power supply	<b>Rated Voltage</b> :AC90-240V <b>Rated Frequency</b> : 50-60Hz + - 10% <b>Fuse</b> : AC250V/5A
LED	<b>LED Type</b> : 31 pcs 10w White led <b>Drive Current</b> : 10A <b>Colors</b> : White <b>Life</b> : 100000 Hours
Control	<b>Control Protocol</b> : International Standard DMX-512 signal <b>Channel Protocol</b> : 2 Control Channel mode. 1CH/2CH modes can be chosen <b>Control Mode</b> -DMX-512, master-slave mode, static mode and LED
Optical System	<b>Dimming Mode</b> : Dimmer 0 Means fast linear dimming D <b>Dimmer</b> : From 0-100 Linear dimming <b>Lens</b> : Honeycomb type high transparent PMMA second optical lens <b>Strobe Speed</b> : 1-20Hz <b>Beam angle</b> : 22
Security	<b>Cooling System</b> : Fan <b>Temperature Protection</b> : 65 C <b>Operating Environment</b> : Indoor <b>Working Temperature</b> : 20 C- 40 C
Physical	<b>Dimensions</b> : 410X268X268 mm <b>Weight</b> : 7.25 kg <b>Surface Treatment</b> : Die-casting aluminum, high temperature Black Paint <b>Housing color</b> : Black (can be customized) <b>Connection</b> : XLR IN/OUT, Power Con IN/OUT <b>Packed Size</b> : 300*300*560mm